

■ Features

- 1. Suitable for flammable working environments.
- 2. The valve is actuated by air for accurate response.



■ How to order


<b>SK520</b> 520 : 5/2 Way 530 : 5/3 Way	<b>X</b> Acting style Blank : Standard 5/3 Way Blank : Closed center X : Exhaust center Y : Pressurized center	<b>01</b> Port size 01 : 1/8" (option) 02 : 1/4" 03 : 3/8" 04 : 1/2"	<b>N</b> Thread Blank : G N : NPT R : Rc	<b>S</b> Pneumatic control S : Single pneumatic D : Double pneumatic
--	--	---	--	---

\*\*5/3 way valve is only available for double pneumatic control.


■ Specifications

Model	SK520-02S(D)	SK530-02D	SK520-03S(D)	SK530-03D	SK520-04S(D)	SK530-04D
Port size	1/4"		3/8"		1/2"	
Body material	Aluminum alloy					
Fluid	Compressed air					
Effective area	18mm <sup>2</sup>	14mm <sup>2</sup>	35mm <sup>2</sup>	32mm <sup>2</sup>	70mm <sup>2</sup>	54mm <sup>2</sup>
Acting	External pilot (1.5 ~ 7 kgf/cm <sup>2</sup> )					
Operating pressure range	0~8kgf/cm <sup>2</sup>	0~7kgf/cm <sup>2</sup>	0~8kgf/cm <sup>2</sup>	0~7kgf/cm <sup>2</sup>	0~8kgf/cm <sup>2</sup>	0~7kgf/cm <sup>2</sup>
Proof pressure	9.9 kgf/cm <sup>2</sup>					
Ambient temperature	-10°C ~ 60°C					
Net weight	170g/180g	310g	370g/400g	585g	565g/605g	865g

■ Flow chart

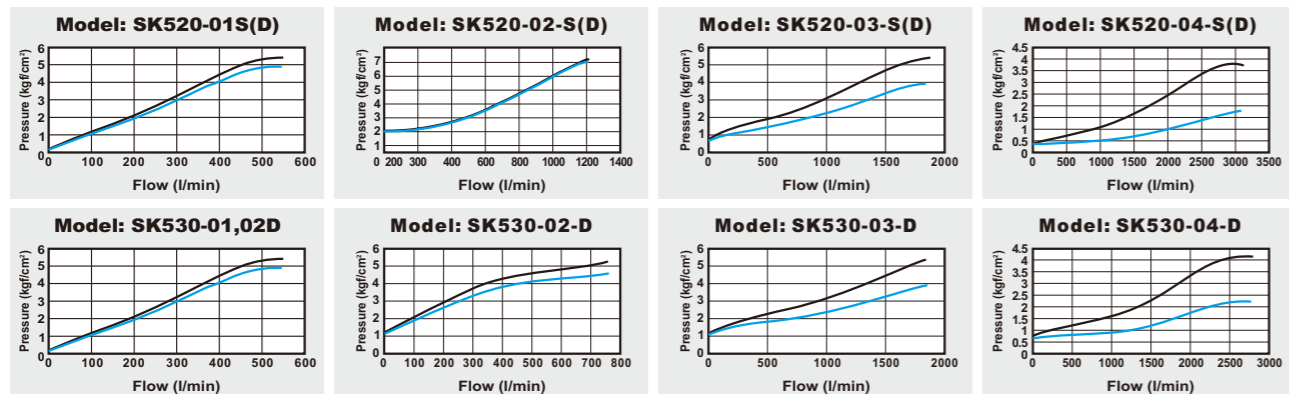

■ Dimensions

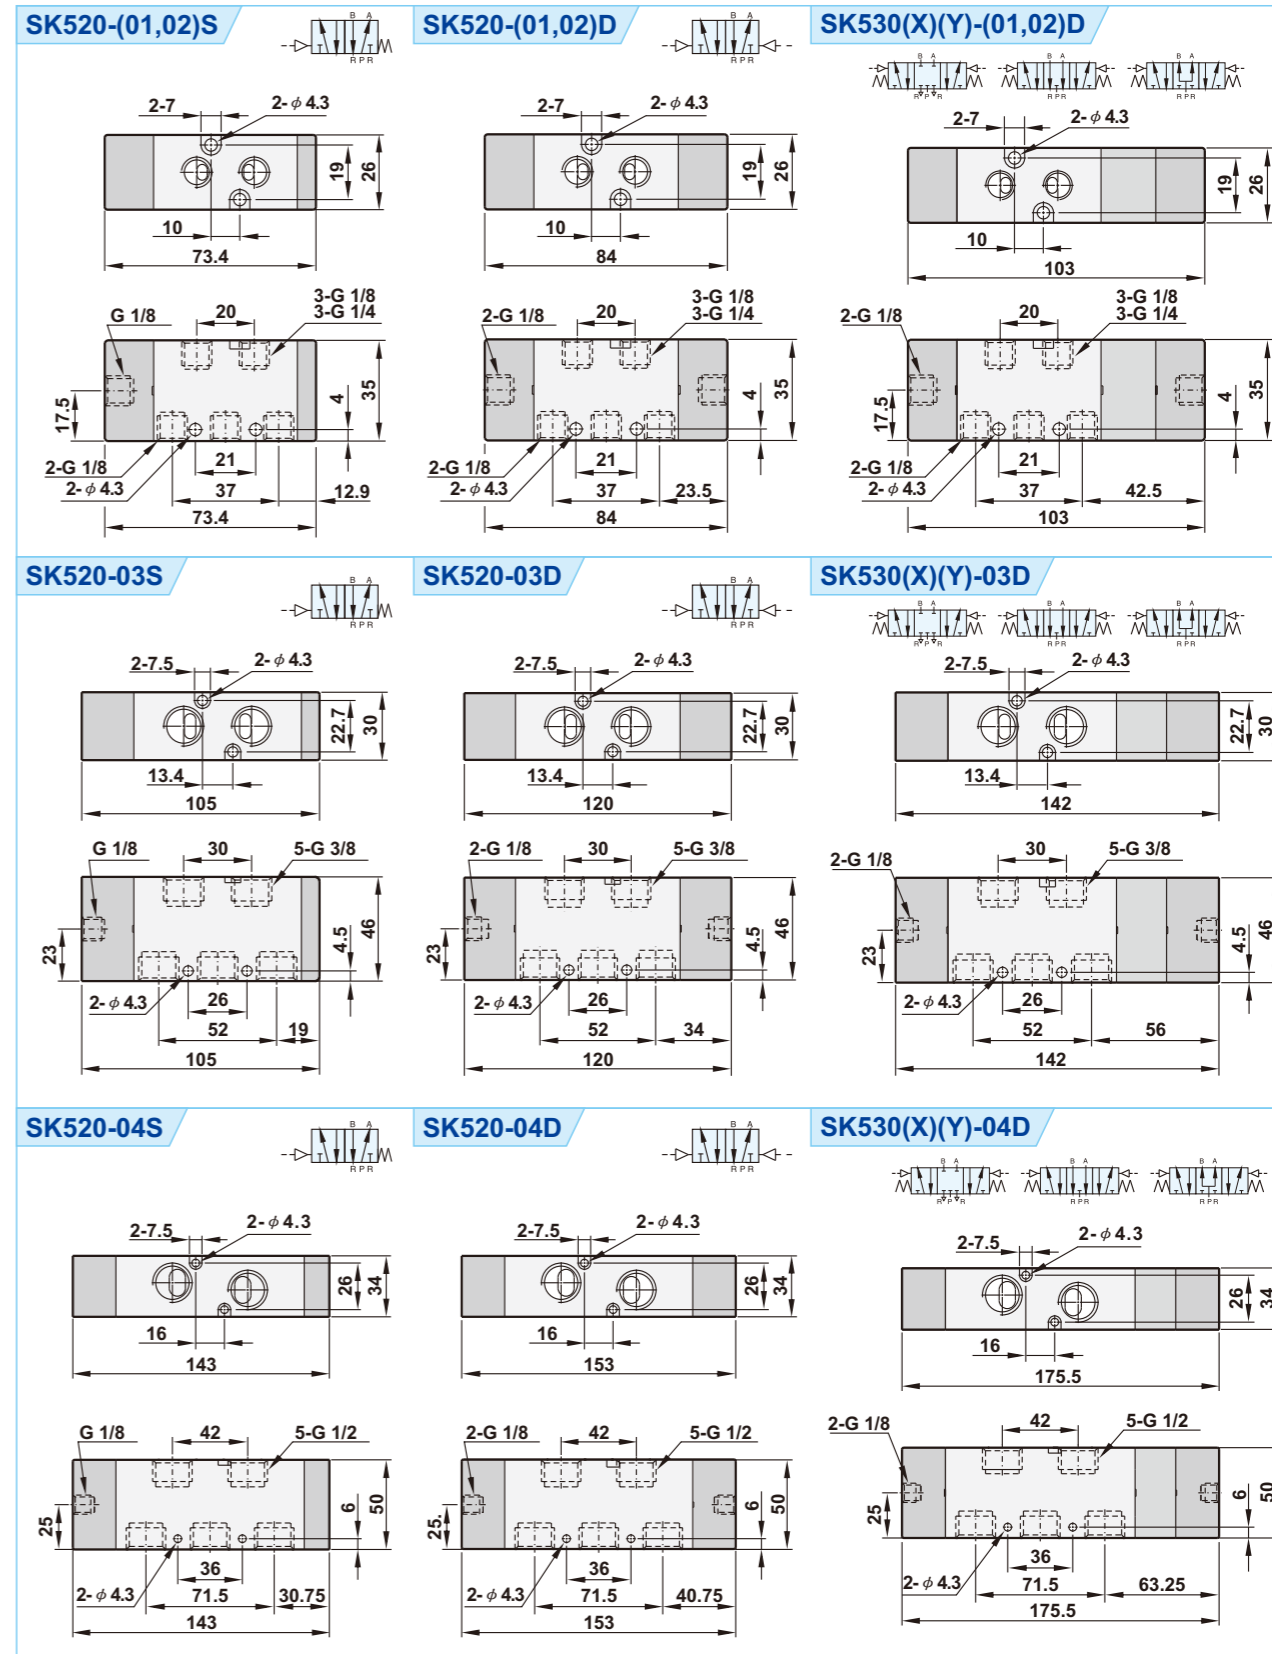

Control Valves  
Pneumatic Valve  
SA  
SB  
SK  
SY  
Hand Control Valve  
TSV  
FSV